

DC-Micromotors

110 mNm

Graphite Commutation

For combination with (overview on page 14-15)

Gearheads:
38/1, 38/2, 44/1


Encoders:
IE2 – 16 ... 512, 5500, 5540

Series 3863 ... C

	3863 H	012 C	018 C	024 C	036 C	048 C	
1 Nominal voltage	U_N	12	18	24	36	48	Volt
2 Terminal resistance	R	0,16	0,40	0,62	1,58	2,47	Ω
3 Output power	$P_{2 \max}$	204	189	220	197	226	W
4 Efficiency	η_{\max}	85	84	85	85	85	%
5 No-load speed	n_0	6 500	6 600	6 700	6 400	6 700	rpm
6 No-load current (with shaft \varnothing 6,0 mm)	I_0	0,480	0,320	0,240	0,150	0,120	A
7 Stall torque	M_H	1 200	1 090	1 250	1 170	1 290	mNm
8 Friction torque	M_R	8,1	8,0	8,0	7,9	8,1	mNm
9 Speed constant	k_n	569	380	287	181	142	rpm/V
10 Back-EMF constant	k_E	1,76	2,63	3,49	5,51	7,05	mV/rpm
11 Torque constant	k_M	16,8	25,1	33,3	52,6	67,3	mNm/A
12 Current constant	k_i	0,060	0,040	0,030	0,019	0,015	A/mNm
13 Slope of n-M curve	$\Delta n / \Delta M$	5,4	6,1	5,4	5,5	5,2	rpm/mNm
14 Rotor inductance	L	30	70	130	280	500	μ H
15 Mechanical time constant	τ_m	6	6,5	6	6	6	ms
16 Rotor inertia	J	110	100	110	100	110	gcm ²
17 Angular acceleration	α_{\max}	110	110	120	110	120	$\cdot 10^3$ rad/s ²
18 Thermal resistance	R_{th1} / R_{th2}	1,5 / 6					K/W
19 Thermal time constant	τ_{w1} / τ_{w2}	33 / 843					s
20 Operating temperature range:							
– motor		– 30 ... +125					°C
– rotor, max. permissible		+155					°C
21 Shaft bearings		ball bearings, preloaded					
22 Shaft load max.:							
– with shaft diameter		6,0					mm
– radial at 3 000 rpm (3 mm from bearing)		60					N
– axial at 3 000 rpm		6					N
– axial at standstill		50					N
23 Shaft play:							
– radial	\leq	0,015					mm
– axial	$=$	0					mm
24 Housing material		steel, black coated					
25 Weight		400					g
26 Direction of rotation		clockwise, viewed from the front face					

Recommended values - mathematically independent of each other

27 Speed up to	$n_{e \max}$	8 000	8 000	8 000	8 000	8 000	rpm
28 Torque up to	$M_{e \max}$	110	110	110	110	110	mNm
29 Current up to (thermal limits)	$I_{e \max}$	7,6	4,9	3,8	2,4	1,9	A

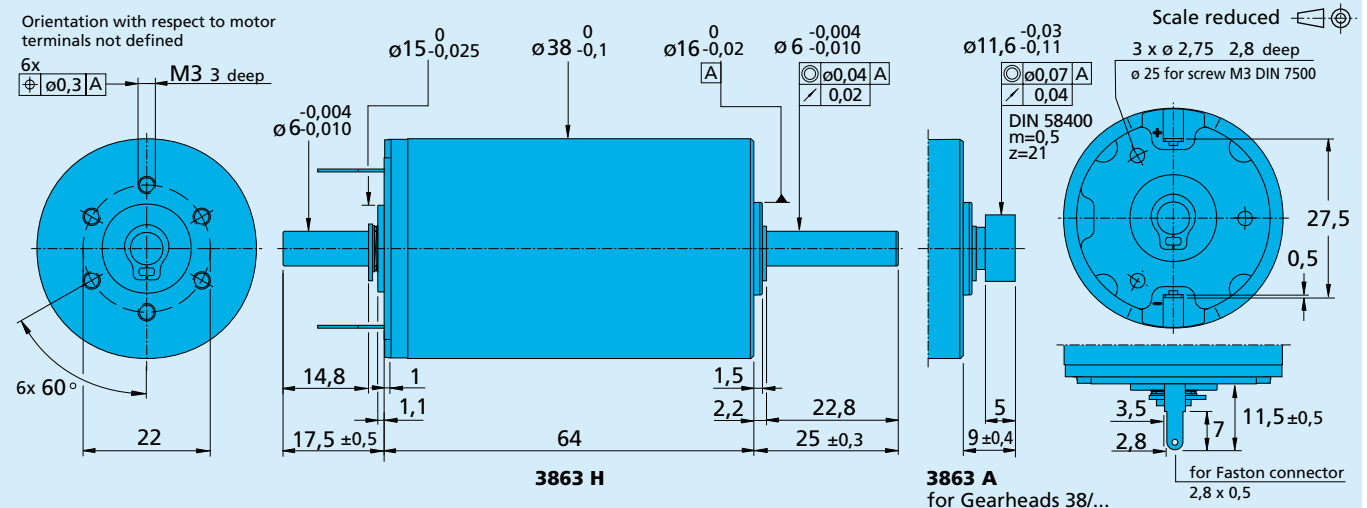

For details on technical information and lifetime performance refer to pages 28-34.

Edition 2006-2007

For options on DC-Micromotors refer to page 64. Specifications subject to change without notice.

www.faulhaber.com